




TECHNICAL PROPERTIES



EN388

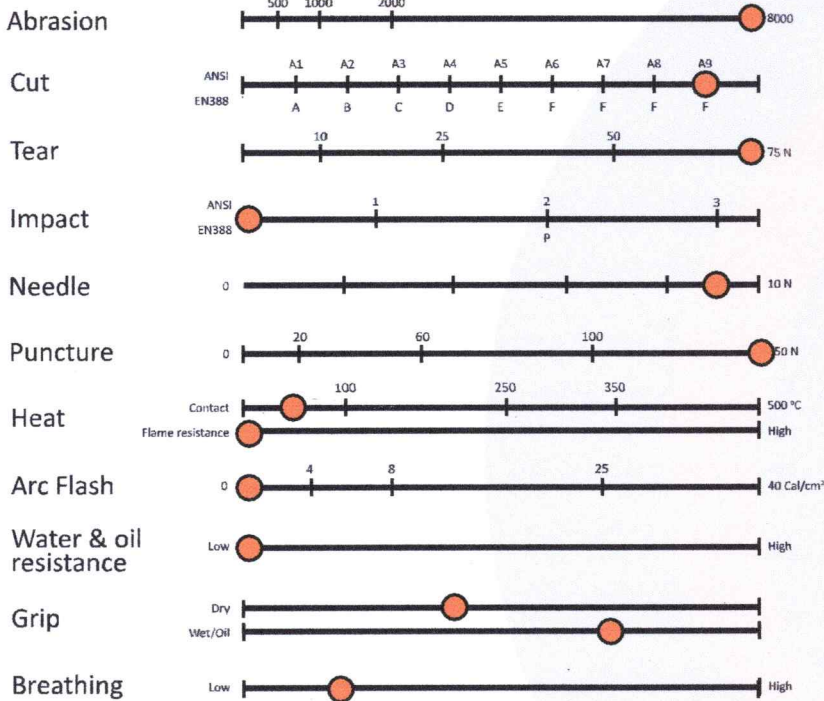

4544F

- A: ABRASION (1-4)
- B: CUT (1-5)
- C: TEAR (1-4)
- D: PUNCTURE (1-4)
- F: ISO CUT (A-F)
- P: IMPACT PROTECTION



ASTM F2878
9 N

- ISO (A-F)
- A ≥ 2 N
- B ≥ 5 N
- C ≥ 10 N
- D ≥ 15 N
- E ≥ 22 N
- F ≥ 30 N



ART.NO: 10-6PX
12 pairs (1 dozen)/Carton

